

# Carlube Triple R 0W-20 Fully Synthetic R-Tec 2

Technical  
Data Sheet



## Greater Engine Protection and Improved Fuel-efficiency

Carlube Triple R 0W-20 R-Tec 2 is a trustworthy, reliable and robust engine oil which provides strong corrosion and wear protection to key components in an engine, maintaining a clean and high-performing engine for trouble-free driving.


## Performance Benefits

Carlube Triple R 0W-20 R-Tec 2 is suitable for the latest fuel-efficient cars meeting Euro 6 where 0W-20 SAE grade is recommended. It combines several key 0W-20 OEM approvals. It delivers high Fuel Economy in latest OEM tests. It keeps hot running engine components clean including the prevention of deposit in Turbochargers. The SAPS level ensures after-treatment operation over its lifetime including engines equipped with Gasoline Particulate Filters. Carlube Triple R 0W-20 R-Tec 2 also provides multiple 0W-20 OEM specifications on one oil. This reduces complexity and the need to stock several oils. The product delivers high fuel economy in the latest OEM specifications. Delivers cleanliness and turbocharger protection in highly loaded engines.


Carlube Triple R 0W-20 Fully Synthetic R-Tec 2 protects engines from wear and corrosion all year round.



Wear Performances

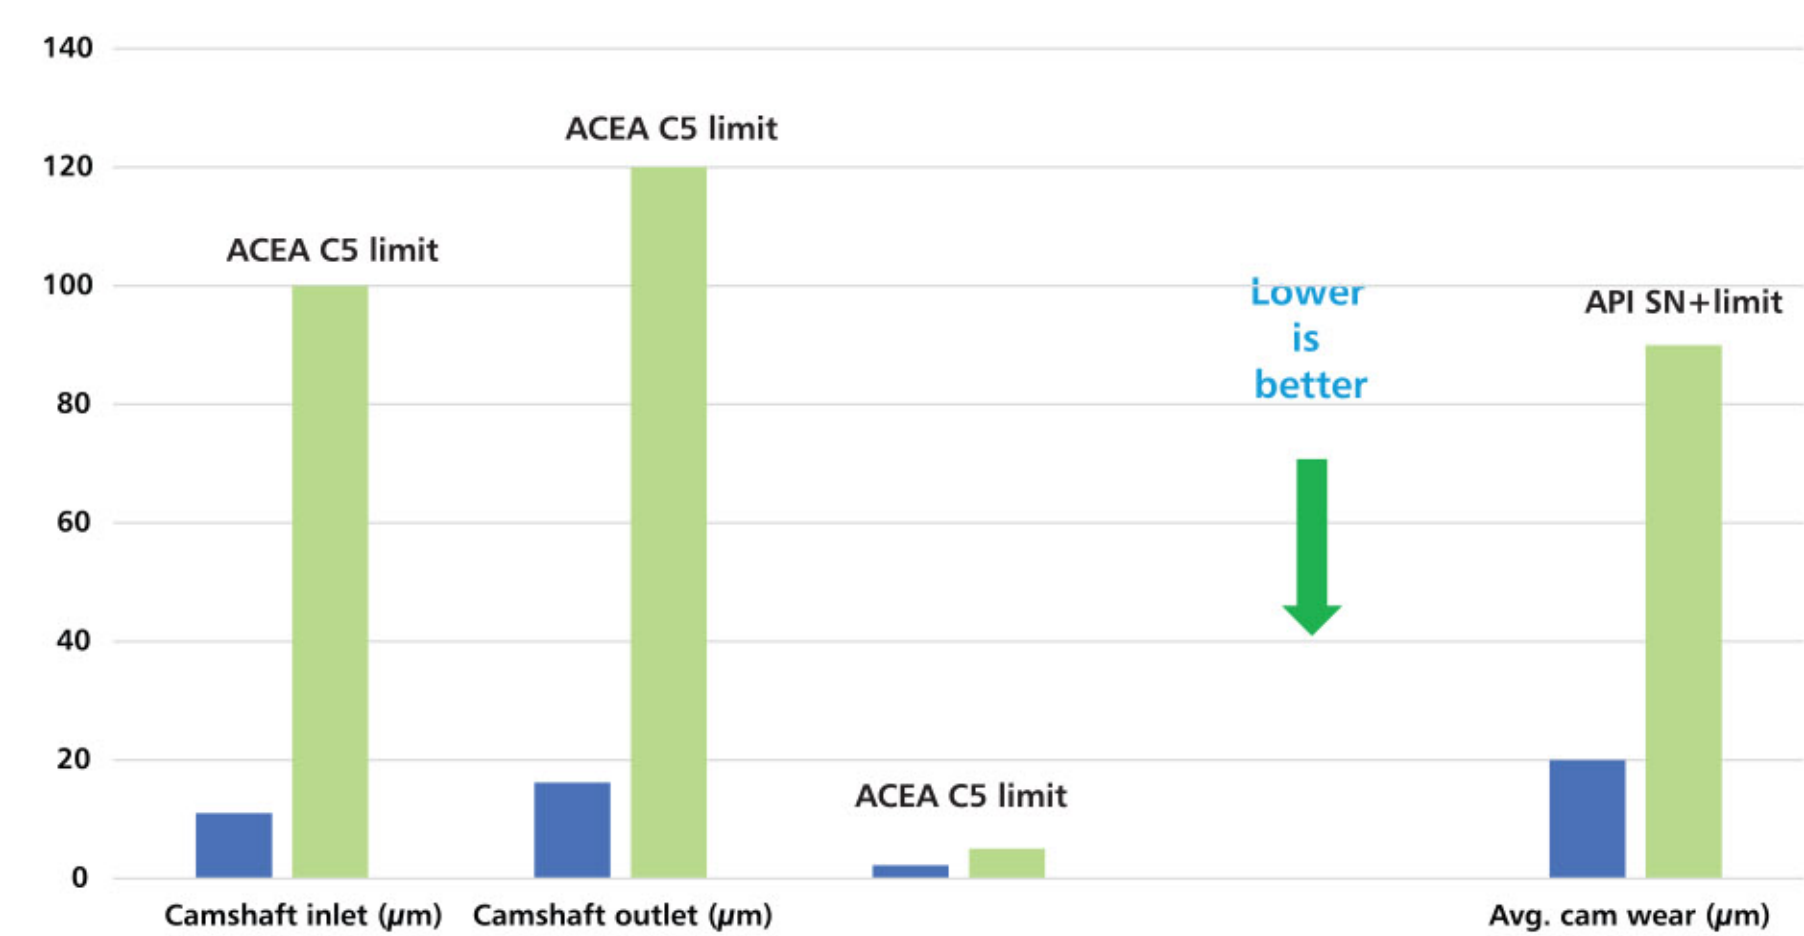

LSPI Performances

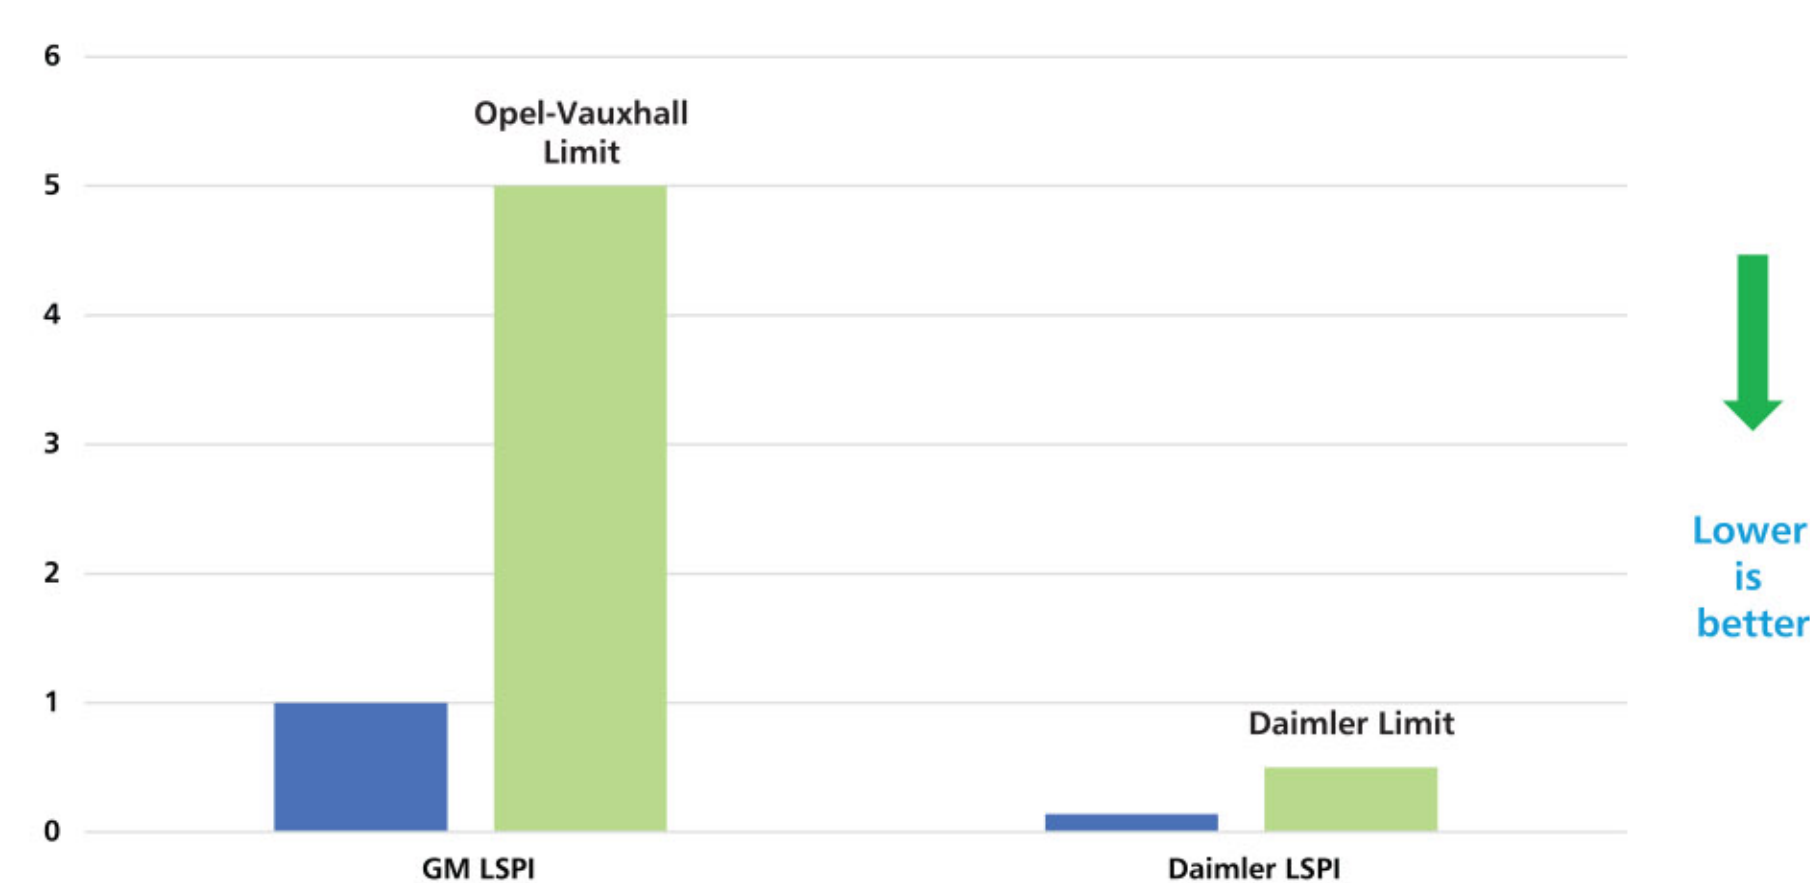

Carlube - The Heartbeat of your engine



Carlube Triple R 0W-20 Fully Synthetic R-Tec 2 Performance Specifications

| Issuing Body | Performance Specification |
|--------------|---------------------------|
| ACEA         | C5                        |
| API          | SN                        |
| ILSAC        | GF-5                      |
| BMW          | BMW LL-17 FE+             |
| Daimler      | MB 229.71                 |
| Volvo        | Volvo VCC RBS0-2AE        |
| Opel         | Poal Ov0401547            |
| DEXOS        | GM Dexos D                |



Product Reference

| Size      | Part No | Barcode       |
|-----------|---------|---------------|
| 1 Litre   | KCZ001  | 5010373117705 |
| 5 Litre   | KCZ005  | 5010373117712 |
| 20 Litre  | KCZ020  | 5010373117729 |
| 199 Litre | KCZ199  | 5010373119372 |

Properties

| Property                                 |        | Result |
|--|--------|--------|
| SAE Viscosity Grade                      |        | 0W-20  |
| Density @ 15°C (g/mL)                    |        | 0.860  |
| Kinematic Viscosity (mm <sup>2</sup> /s) | @40°C  | 42.0   |
|  | @100°C | 8.20   |
| Viscosity Index (VI)                     |        | 174    |
| Pour Point (°C)                          |        | -60°C  |
| Flash Point (°C)                         |        | >220°C |
| Sulphated Ash (%)                        |        | 0.77   |
| TBN (mgKOH/g)                            |        | 7.90   |

Environmental Protection & Safety Precautions

Do not pour used surplus oil down sewers or drains. Dispose of used or surplus oil at your nearest oil-recycling bank. Dispose of empty packs in a responsible manner. Store container in an upright position and secure when transported. Wear goggles if splashing risk. Avoid exposure to oil mist. When using oil do not eat, drink or smoke. Wash hands after use.

Disclaimer

This Product Information Sheet does not constitute to any extent a fitness for purpose warranty or a quality specification. It is intended to be indicative only of the general characteristics of the product(s) and may not be relied upon (in whole or in part) in substitution of nor as a supplement to any of the information and/or instructions and/or warnings set out on the product(s) and/or on any packaging and/or in the relevant Safety Data Sheet (which is available on request).

Users of a product marked “For Professional Use Only” are deemed to declare and acknowledge for themselves professional levels of skill, knowledge, competence and experience in the selection and use of such product(s).

Product Information Sheets are updated from time to time and inquiries should be made on a regular basis to ensure that this is the latest version available.